



4625 OLPSW5

Optional 360° Swivel 600248

Spray Valve 600080



A5835 OLBSW23

Spring Retractable Pre-Rinse Reels - 3/8" I.D.

Engineered for use in highly corrosive environments such as restaurants, institutions, and home and garden applications. Reelcraft's pre-rinse reels include a standard lever-operated spray valve. Available in stainless or powder-coat finish. Rated for hot water up to 210° F (99° C).

Hot water washdown and food prep

Commercial use, restaurants, schools, home/garden and more

Spring Retractable Potable (Drinking) Water Reel - 1/2" I.D.

Designed for potable water systems, the A5835 OLBSW23 is suitable for use as a drinking water system component. Fluid path is stainless steel and CPVC material.

Drinking Water

Boats, RVs, buses and much more

PRE-RINSE REEL FEATURES


- ✓ Lever-operated spray valve is included
- ✓ Optional 360° rotating swivel (600248) offers 20 degrees of angular motion
- ✓ Push-Lok, field replaceable, hose-end fittings
- ✓ Reels can be mounted on the wall, ceiling, or under a counter, making water conveniently available
- ✓ Latching mechanism holds hose at desired length



POTABLE WATER REEL FEATURES

- ✓ Stainless steel, full flow shaft and PVC swivel
- ✓ Convenient fast hook-up and disconnect
- ✓ Drain and standard female garden hose outlet fitting are standard
- ✓ Maximum operating temperature 86° F (30°C)

Dimensions - Size Index

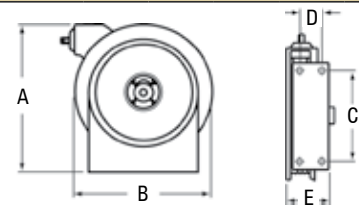

No.	1		2		3	
	in / mm		in / mm		in / mm	
A	12 ⁷ / ₈	327	14 ¹ / ₂	368	18 ¹ / ₂	470
B	12 ⁵ / ₈	321	13 ¹ / ₂	343	15	381
C	8	203	9 ³ / ₄	248	9 ³ / ₄	248
D	2 ¹ / ₂	64	2 ¹ / ₂	64	2 ¹ / ₂	64
E	5 ³ / ₈	137	6	152	7	178

Four 5/16" (8mm) diameter mounting holes.

Model with Hose	Shipping Weight		Pressure		Hose I.D.		Hose O.D.		(F)NPTF Inlet	Hose Length		Size Index No.
	lbs	kg	psi	bar	in	mm	in	mm	in	ft	m	
Pre-Rinse Hose Reels												
4625 OLPSW5	22	10	250	17	3/8	10	.640	16	3/8	25	8	1
5635 OLPSW5	27	12	250	17	3/8	10	.640	16	3/8	35	11	2
5635 ELPSW5	37	17	250	17	3/8	10	.640	16	3/8	35	11	3
Pre-Rinse Stainless Steel Hose Reels												
5635 OLSSW5	28	13	250	17	3/8	10	.640	16	3/8	35	11	2
5635 ELSSW5	38	17	250	17	3/8	10	.640	16	3/8	35	11	3
Potable (Drinking) Water Reels Garden hose fitting 3/4" N/H threads (F)												
A5835 OLBSW23*	28	13	150	10	1/2	13	.781	20	1/2 male	35	11	2

*Maximum operating temperature is 86° F (30° C).

Available Options

Mounting Brackets
See page 47



Inlet Hose Assemblies
See page 49



Replacement Bumpers
See page 49



Call customer service for special hoses

