

Medium Duty Hand Crank Reels

Series H - Air/Water/Oil/Grease - 3/8", 1/2", 3/4" I.D.

Series H is an economical reel designed for medium duty applications requiring long lengths of hose. It is equally suited for plant or field use such as turf care, pest control, steam cleaning and more. Shipped completely assembled, ready to install.


Made in USA 



Medium duty
H16000

Model without hose & bumper	Shipping Weight		Pressure		Hose I.D.		Hose O.D.		(F)NPTF Reel Outlet	(F)NPTF Reel Inlet	Hose Length		Size Index No.
	lbs	kg	psi	bar	in	mm	in	mm	in	in	ft	m	
Low Pressure Air/Water Hose Reels Max temperature 150°F (65°C)													
H16000	32	15	500	35	3/8	10	.688	17	3/8	3/8	300	91	1
H18000	34	15	1000	69	1/2	13	.844	21	1/2	1/2	200	61	1
H28005	34	15	1000	69	1/2	13	.844	21	1/2	1/2	300	91	3
H28000	37	17	1000	69	1/2	13	.844	21	1/2	1/2	300	91	2
H19000	33	15	1000	69	3/4	19	1.118	30	3/4	3/4	100	30	1
H29005	36	16	1000	69	3/4	19	1.118	30	3/4	3/4	100	30	3
H29000	41	19	1000	69	3/4	19	1.118	30	3/4	3/4	150	46	2
Medium Pressure Oil Hose Reels Max temperature 210°F (99°C)													
H16000 M	32	15	3000	207	3/8	10	.688	17	3/8	3/8	300	91	1
H18000 M	34	15	3000	207	1/2	13	.844	21	1/2	1/2	200	61	1
H19000 M	38	17	3000	207	3/4	19	1.118	30	3/4	3/4	80	24	1
H29000 M	35	16	3000	207	3/4	19	1.118	30	3/4	3/4	125	38	2
High Pressure Grease Hose Reels Max temperature 210°F (99°C)													
H16000 H	35	16	5000	345	3/8	10	.750	19	3/8	3/8	250	76	1

Reels are supplied without hose; assemblies will be quoted upon request. **CAUTION:** To prevent drum damage fully extend and pressurize hose and rewind on the reel. Stainless models available, see page 19.

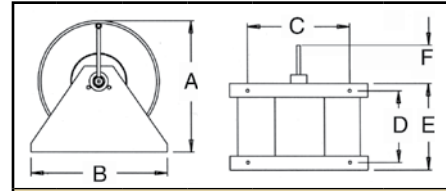

Dimensions - Size Index

No.	1		2		3	
	in	mm	in	mm	in	mm
A	19	483	19	483	20 ¹ / ₈	512
B	20	508	20	508	14	356
C	15	381	15	381	10	254
D	10	254	16	407	16	407
E	12 ¹ / ₂	318	18 ¹ / ₂	470	18 ¹ / ₂	470
F	5 ³ / ₄	146	5 ³ / ₄	146	5 ³ / ₄	146

Four 7/16" (11mm) diameter mounting holes.



Motor Driven
EA33112 L12D

Heavy Duty Hand Crank and Motor Driven Reels

Series 30000 - Air/Water/Oil - 1/4", 1/2", 3/4", 1" I.D.

Reelcraft's Series 30000 reels are designed for rugged, heavy duty applications requiring long lengths of hose and large storage capacity. All-bolted unitized construction with no welds to fatigue, full flow swivel and heavy gauge steel frame, spool and drum ensure longest service life. Series 30000's vibration-proof, self-locking fasteners are ideal for industrial or field use such as turf care or pest control.

- ✓ Adjustable spool rotation drag that eliminates hose backlash
- ✓ Permanently lubricated dual main bearings
- ✓ All bolted construction - no welds
- ✓ Nickel-plated swivel with four O-ring options: AFLAS (standard), Buna, Viton® or -EPR* seals *Standard swivel
- ✓ Ball bearing swivel (excludes 1/2" low pressure models)
- ✓ Optional lock pin to prevent spool rotation when the reel is not in use, part #S600874
- ✓ Motor mounting at either end of reel
- ✓ Full flow shaft

Available Options

Pivot Brackets
See page 47



Hose Roller Guides
See page 47



Switches & Motors
See page 48



Hose Assemblies
See page 50

