

Heavy Duty Large Frame Reels Nordic Series 2400

1/2", 3/4" or 1" Fluid Path for 1/2" through 1" I.D. Hose


Rewind: Gear-drive rewind (new) or chain and sprocket drive powered by A.C. or D.C. electric motor, compressed air motor or hydraulic motor.

Inlet: 1/2" up to 1" female/male NPT 90° swivel joint. Straight swivel joint may be specified at extra cost.

Gooseneck: 1/2" up to 1" female/male NPT. Other sizes and/or threads, including male NST and male garden hose thread, can be furnished when specified.

Product temperatures from -20° to +225°F and standard pressures to 3000 p.s.i. Reels to operate at other temperatures or pressures can be furnished at extra cost, consult manufacturer. The standard color for this series is red or gray. ADD 12" to E dimension when crank is in rewind position.


NEW!
Gear drive
option

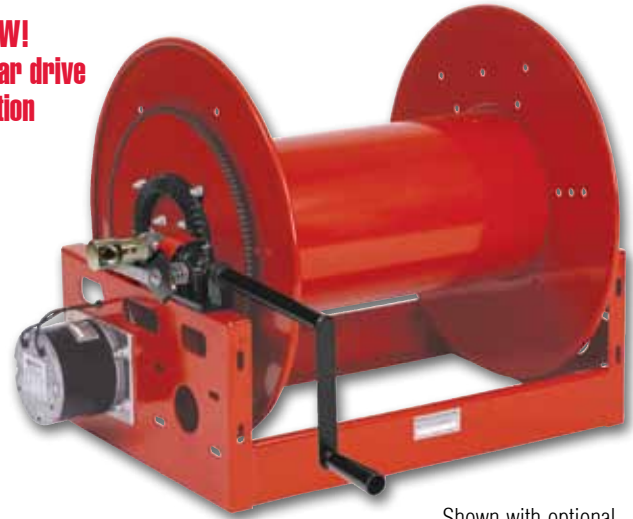

**1/2" pitch chain
now standard**

Shown with optional
bevel crank.

**Made
in USA**

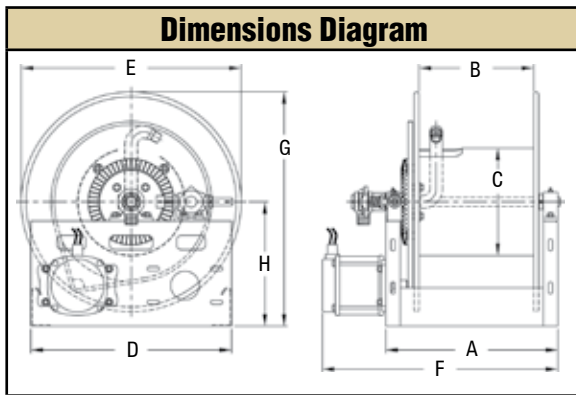

Fire Service / Booster Reels

The **aluminum Series 2450** reel for booster hose is corrosion-resistant and weighs up to 50% less than standard steel booster reels. Features include an aluminum spool and frame assembly, plated steel fluid path and plated sprocket and fasteners. **No painting or finishing is required.**

Nordic Series 2450



| Hose I.D. | in mm | 1/2 | 3/4 | 1 | Specification - Hose Capacity and Reel Dimensions | | | | | | | | | | | | | | | |
|------------|---|------|-------|-------|---|----|-----|-----|-------|----------|----------|----------|----------|----------|----------|----------|----------|------|------|----|
| | | 13 | 19 | 25 | KEY: CRK = hand crank; ELC = electric motor; HYD = hydraulic motor; AIR = air moter | | | | | | | | | | | | | | | |
| Hose O.D. | in mm | .875 | 1.281 | 1.563 | | | | | | | | | | | | | | | | |
| | mm | 22 | 33 | 40 | | | | | | | | | | | | | | | | |
| Model | Hose Length (other std. lengths available) | | | | Est. Weight | A | B | C | D | E CRK | E ELC | E AIR | E HYD | F CRK | F ELC | F AIR | F HYD | G | H | |
| | ft | m | ft | m | | | | | | | | | | | | | | | | ft |
| 2400-19-16 | ft | 200 | 100 | 50 | 70 LB | in | 22 | 16 | 11.25 | 21 | 21 | 21 | 21 | 26 | 29 | 28 | 28 | 22.5 | 13 | |
| | m | 61 | 30 | 15 | 32 KG | mm | 559 | 406 | 286 | 533 | 533 | 533 | 533 | 660 | 737 | 711 | 711 | 572 | 330 | |
| 2400-23-14 | ft | 315 | 150 | 100 | 74 LB | in | 20 | 14 | 11.25 | 21 | 23 | 23 | 24 | 23 | 24 | 27 | 26 | 26 | 24.5 | 13 |
| | m | 96 | 46 | 30 | 34 KG | mm | 508 | 356 | 286 | 533 | 584 | 584 | 584 | 610 | 686 | 660 | 660 | 622 | 330 | |
| 2400-23-18 | ft | 485 | 240 | 150 | 78 LB | in | 24 | 18 | 11.25 | 21 | 23 | 23 | 23 | 28 | 31 | 30 | 30 | 24.5 | 13 | |
| | m | 148 | 73 | 46 | 35 KG | mm | 610 | 457 | 286 | 533 | 584 | 584 | 584 | 711 | 787 | 762 | 762 | 622 | 330 | |
| 2400-23-20 | ft | 535 | 260 | 165 | 80 LB | in | 26 | 20 | 11.25 | 21 | 23 | 23 | 23 | 30 | 33 | 32 | 32 | 24.5 | 13 | |
| | m | 163 | 79 | 50 | 36 KG | mm | 660 | 508 | 286 | 533 | 584 | 584 | 584 | 762 | 838 | 813 | 813 | 622 | 330 | |
| 2400-23-24 | ft | 625 | 300 | 200 | 84 LB | in | 30 | 24 | 11.25 | 21 | 23 | 23 | 23 | 34 | 37 | 36 | 36 | 24.5 | 13 | |
| | m | 191 | 91 | 61 | 38 KG | mm | 762 | 610 | 286 | 533 | 584 | 584 | 584 | 864 | 940 | 914 | 914 | 622 | 330 | |
| 2400-25-8 | ft | 235 | 125 | 60 | 72 LB | in | 14 | 8 | 11.25 | 21 | 25 | 25 | 25 | 18 | 21 | 20 | 20 | 26.5 | 14 | |
| | m | 72 | 38 | 18 | 33 KG | mm | 356 | 203 | 286 | 533 | 635 | 635 | 635 | 457 | 533 | 508 | 508 | 673 | 356 | |
| 2400-25-14 | ft | 450 | 225 | 110 | 74 LB | in | 20 | 14 | 11.25 | 21 | 25 | 25 | 25 | 24 | 27 | 26 | 26 | 26.5 | 14 | |
| | m | 137 | 69 | 34 | 34 KG | mm | 508 | 356 | 286 | 533 | 635 | 635 | 635 | 610 | 686 | 660 | 660 | 673 | 356 | |
| 2400-31-8 | ft | 435 | 185 | 125 | 74 LB | in | 14 | 8 | 11.25 | 24 | 31 | 31 | 31 | 18 | 21 | 20 | 20 | 32.5 | 17 | |
| | m | 133 | 56 | 38 | 34 KG | mm | 356 | 203 | 286 | 610 | 787 | 787 | 787 | 457 | 533 | 508 | 508 | 826 | 432 | |
| 2400-31-10 | ft | 540 | 235 | 165 | 76 LB | in | 16 | 10 | 11.25 | 24 | 31 | 31 | 31 | 20 | 23 | 22 | 22 | 32.5 | 17 | |
| | m | 165 | 72 | 50 | 34 KG | mm | 406 | 254 | 286 | 610 | 787 | 787 | 787 | 508 | 584 | 559 | 559 | 826 | 432 | |
| 2400-31-16 | ft | 900 | 400 | 300 | 80 LB | in | 22 | 16 | 11.25 | 24 | 31 | 31 | 31 | 26 | 29 | 28 | 28 | 32.5 | 17 | |
| | m | 274 | 122 | 91 | 36 KG | mm | 559 | 406 | 286 | 610 | 787 | 787 | 787 | 660 | 737 | 711 | 711 | 826 | 432 | |

Refer to page 28 to build a complete model number. Refer to chart on page 31 for weight adders.