

Liquid Propane Reels | Nordic Series 3900 LPG / 80000 / D80000


Heavy Duty Large Frame Reels Nordic Series 3900 LPG

1 1/2" or 2" fluid path for 1" through 2" I.D. hose

Rewind: Gear-drive or chain and sprocket drive powered by explosion proof A.C. or D.C. electric motor, compressed air motor or hydraulic motor.

Inlet: Full Circle® UL approved swivels available in 1", 1 1/2" and 2" as standard.


Now available in polished aluminum

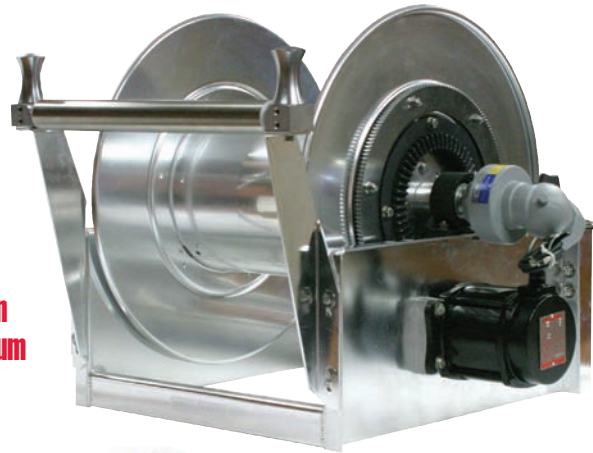

Hose Boss (optional accessory)

The Hose Boss Rewind Assist consists of a rewind switch mounted in an extended arm with two hose rollers. Assists in efficiently and safely unwinding and rewinding hose.

Made in USA

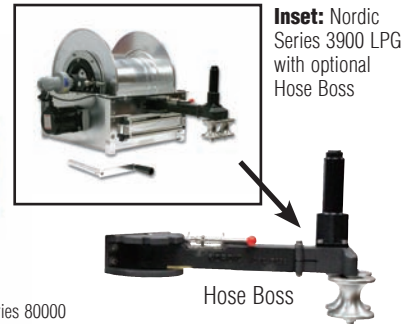

Inset: Nordic Series 3900 LPG with optional Hose Boss


Heavy Duty Spring Retractable Reels Series 80000/D80000 - 1/2", 3/4", 1" I.D.

OPTIONS

Choose a reel model from the chart below, then use the suffix codes below to choose a flange/end plate material.

LP82000 OL□

Flange/End Plate Material	
S	Stainless Steel
P	Carbon Steel



Hose not included

Series 80000 Carbon steel With Full Circle® swivel

Hose Boss

Model without hose	Hose I.D.		Hose O.D.		Capacity		Pressure		Weight		A		B		C		D		E		F	
	in	mm	in	mm	ft	m	psi	bar	lbs	kg	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
Series 80000 / D80000: Spring Driven Reels																						
LP82000 OL□*	1/2	13	.845	21	100	30	300	21	82	37	25 3/8	645	24	610	10	254	6	152	15 3/8	391	8 1/8	206
LP83000 OL□*	3/4	19	1.188	30	50	15	350	24	82	37	25 3/8	645	24	610	10	254	6	152	15 3/8	391	8 1/8	206
LPD83000 OL□*	3/4	19	1.188	30	75	23	350	24	77	35	25 3/8	645	24	610	10 1/2	267	7 7/8	200	17 3/4	451	10 3/8	264
LPD84000 OL□*	1	25	1.500	38	50	15	350	24	77	35	25 3/8	645	24	610	10 1/2	267	7 7/8	200	17 7/8	454	10 3/8	264

*Choose flange/end plate material from charts above. Refer to page 13 for dimension chart.

Hose I.D.	in	1	1 1/4	1 1/2	2	Specification - Hose Capacity and Reel Dimensions											
	mm	25	32	38	51	Refer to chart on page 31 for Series 3900 LPG dimensions.											
Hose O.D.	in	1.563	1.813	2.063	2.563												
	mm	40	46	52	65												
Model	Hose Length					Est. Weight	A	B	C	D	E	F	G	H			
	ft	m	ft	m	ft										m	in	mm
3900-19-20	ft	70	65	55		103 LB	22.5	21	21	26	33	20	11.25	13			
	m	21	20	17		47 KG	572	533	533	660	838	508	286	330			
3900-23-16	ft	140	80	75		100 LB	24.5	23	21	22	29	16	11.25	13			
	m	43	24	23		45 KG	622	584	533	559	737	406	286	330			
3900-23-20	ft	170	110	95		105 LB	24.5	23	21	26	33	20	11.25	13			
	m	52	34	29		48 KG	622	584	533	660	838	508	286	330			
3900-23-24	ft	210	130	115		110 LB	24.5	23	21	30	37	24	11.25	13			
	m	64	40	35		50 KG	622	584	533	762	940	610	286	330			
3900-25-14	ft	150	105	65		102 LB	26.5	25	21	20	27	14	11.25	14			
	m	46	32	20		46 KG	673	635	533	508	686	356	286	356			
3900-25-18	ft	210	135	85		105 LB	26.5	25	21	24	31	18	11.25	14			
	m	64	41	26		48 KG	673	635	533	610	787	457	286	356			
3900-23-26	ft			95	35	112 LB	24.5	23	21	32	39	26	15	13			
	m			29	11	51 LG	622	584	533	813	991	660	381	330			
3900-31-12	ft			95	55	102 LB	32.5	31	24	18	25	12	15	17			
	m			29	17	46 KG	826	787	610	457	635	305	381	432			
3900-31-22	ft			185	110	115 LB	32.5	31	24	28	35	22	15	17			
	m			56	34	52 KG	826	787	610	711	889	559	381	432			

Refer to page 28 to build a representative model number including LPG swivel. Refer to charts on page 13 and 31 for dimensions.

Built to order, not returnable.