

Series RT Reels



reelcraft.com



Lighterweight, Economical Reels | Series RT

Series RT is ideal for...

- Light industrial
- Air-powered tools
- Assembly lines
- Machine shops
- Maintenance shops
- Auto / truck repair
- Auto paint & body
- Farm & ranch
- Woodworking
- Garden shops
- Home workshops
- Many more uses

Rely on Reelcraft for convenience, versatility and value. Keep hoses organized, save time, improve safety, efficiency and extend hose life. The Series RT is available with or without hose, has a long swivel life and attaches to most surfaces that can be drilled. Rely on Reelcraft to reduce tangled hoses and improve hose logistics.

Kinkless Hose

High quality, industrial-grade kinkless hose is specially blended for use on reels.

Long-Lasting Latch Spring


A stainless steel torsion spring is used on the latch to insure maximum life.

Corrosion Resistance

Steel components are individually powder coated and combined with composite materials, which virtually eliminates corrosion.

Long Swivel Life

Our precision, field-proven swivel assures long service life.

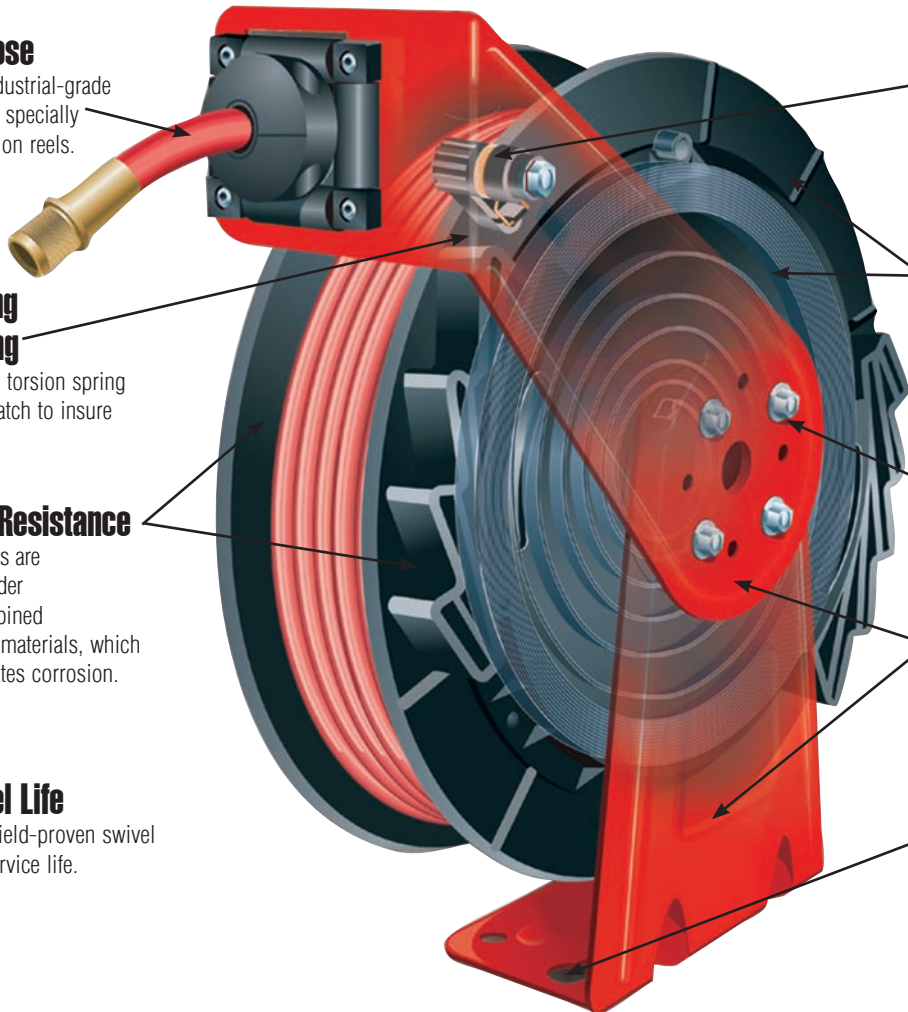

Hose Retracts Every Time

The latch mechanism is mounted on the arm to insure hose extends and retracts every time.

Easy Maintenance

The glass-filled composite spool and spring case contains the industrial-grade drive-spring. The spring is protected from the environment for longer life.

Versatile Mounting

The guide arm can be adjusted to any of seven convenient locations.

Structural Strength

The base and guide arm are made of heavy gauge steel stampings, with re-reinforced ribs to increase structural strength. Main shaft is 1" outside diameter (O.D.), cold-rolled steel.

Easy to Mount

The base has two slotted holes for easy mounting and adjustment.

Add a little color to your order.

Reeltek is now available in yellow, black or blue. Call to place your order today.



RT625-OLP-42YE



RT650-OLP-35BK




RT625-OLP-40BL

Lighterweight, Economical Reels | Series RT


Medium Duty Spring Retractable Reels Air/Water/Oil/Grease - 1/4", 3/8", 1/2" I.D.

Series RT is an economical choice for a medium duty, light weight, spring-driven hose reel for applications that are less demanding, yet require a product that can withstand industrial and commercial use. The industrial-grade drive spring is protected from the environment in a polypropylene spool for longer service life. Guide arm adjusts to seven positions.

Made
in USA

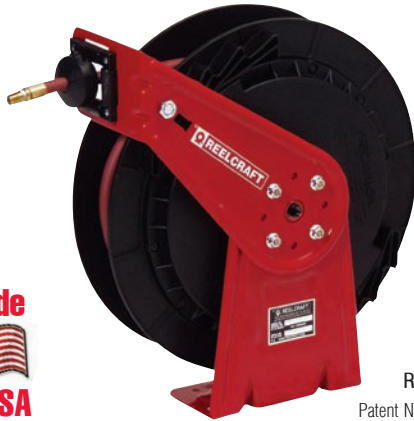

RT650-OLP
Patent No. 7,150,425

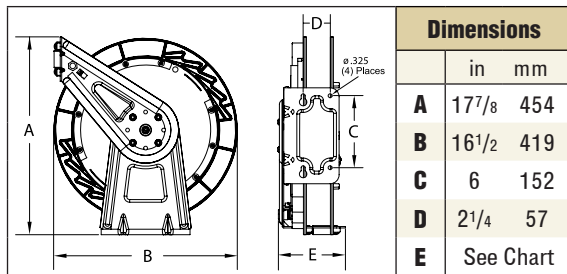

Nitrogen Reels
RT650-OLPG-20GN



Model with Hose	Shipping Weight		Hose I.D.	Hose O.D.	Hose Length	**Max Pressure	(M)NPTF Hose Outlet	(F)NPTF Reel Inlet	Model without hose or bumper	Shipping Weight		Pressure	E						
	lbs	kg								lbs	kg			psi	bar	in	mm		
Low Pressure Air/Water Reels Maximum Temperature 150 °F (65 °C) **Maximum working pressure at 70 °F (20 °C)																			
RT425-OLP	19	9	1/4	6	.475	12	25	8	300	21	1/4	3/8	RT402-OLP	19	9	300	21	5 ³ / ₄	146
RT435-OLP	21	10	1/4	6	.475	12	35	11	300	21	1/4	3/8	RT403-OLP	19	9	300	21	5 ³ / ₄	146
RT450-OLP	24	11	1/4	6	.475	12	50	15	300	21	1/4	3/8	RT405-OLP	21	10	300	21	5 ³ / ₄	146
RT465-OLP	25	11	1/4	6	.475	12	65	20	300	21	1/4	3/8	RT406-OLP	21	10	300	21	5 ³ / ₄	146
RT625-OLP	20	9	3/8	10	.600	15	25	8	300	21	1/4	3/8	RT602-OLP	19	9	300	21	5 ³ / ₄	146
RT635-OLP	21	10	3/8	10	.600	15	35	11	300	21	1/4	3/8	RT603-OLP	19	9	300	21	5 ³ / ₄	146
RT650-OLP	27	12	3/8	10	.600	15	50	15	300	21	1/4	1/2	RT605-OLP	22	10	300	21	6 ¹ / ₄	159
RT825-OLP	26	12	1/2	13	.750	19	25	8	300	21	1/2	1/2	RT802-OLP	23	10	300	21	6 ¹ / ₄	159
RT835-OLP	27	12	1/2	13	.750	19	35	11	300	21	1/2	1/2	RT803-OLP	23	10	300	21	6 ¹ / ₄	159
RT850-OLP	37	17	1/2	13	.750	19	50	15	300	21	1/2	1/2	RT805-OLP	25	11	300	21	7 ³ / ₄	197
Medium Pressure Oil Reels Maximum Temperature 150 °F (65 °C)																			
RT625-OMP	27	12	3/8	10	.710	18	25	8	1000	69	3/8	3/8	RT602-OMP	22	10	1000	69	5 ³ / ₄	146
RT635-OMP	30	14	3/8	10	.710	18	35	11	1000	69	3/8	3/8	RT603-OMP	22	10	1000	69	5 ³ / ₄	146
RT650-OMP	35	16	3/8	10	.710	18	50	15	1000	69	3/8	1/2	RT605-OMP	25	11	1000	69	7 ³ / ₄	197
RT825-OMP	31	14	1/2	13	.820	21	25	8	1000	69	1/2	1/2	RT802-OMP	23	10	1000	69	6 ¹ / ₄	159
RT835-OMP	32	15	1/2	13	.820	21	35	11	1000	69	1/2	1/2	RT803-OMP	23	10	1000	69	6 ¹ / ₄	159
High Pressure Grease Reels Maximum Temperature 150 °F (65 °C)																			
RT425-OHP	28	13	1/4	6	.580	15	25	8	5000	345	1/4	3/8	RT402-OHP	22	10	5000	345	5 ³ / ₄	146
RT435-OHP	30	14	1/4	6	.580	15	35	11	5000	345	1/4	3/8	RT403-OHP	22	10	5000	345	5 ³ / ₄	146
RT625-OHP	30	14	3/8	10	.730	19	25	8	4800	331	3/8	3/8	RT602-OHP	22	10	5000	345	5 ³ / ₄	146
RT635-OHP	34	15	3/8	10	.730	19	35	11	4800	331	3/8	1/2	RT603-OHP	22	10	5000	345	6 ¹ / ₄	159
RT650-OHP	46	21	3/8	10	.730	19	50	15	4800	331	3/8	1/2	RT605-OHP	25	11	5000	345	7 ³ / ₄	197

Low pressure reels furnished standard with PVC hose. Medium pressure reels furnished standard with S.A.E. 100 R1T one wire braid hose or equivalent. High pressure reels furnished standard with S.A.E. 100 R2T two wire braid hose.

Available Options

Mounting Brackets



Inlet Hose Assemblies



Replacement Bumpers



Replacement Hoses



Models listed with an icon can ship same day upon request when the order is received by 11:30 AM Eastern Time for quantities of 10 or fewer.

IN Indiana Warehouse

CA Indiana & California Warehouses

CA California Warehouse

CA Canadian Warehouse

Customer Service: 1.855.634.9109
All Other Calls: 1.800.444.3134

REELCRAFT

North America and Corporate Headquarters

2842 E. Business Hwy 30
Columbia City, IN 46725

Customer Service: 855-634-9109

Ph: 800-444-3134 • Fax: 800-444-4587

Ph: 260-248-8188 • Fax: 260-248-2605

reelcraft@reelcraft.com

www.reelcraft.com

Latin America and the Middle East

Thompson International, Inc.

P.O. Box 12958, Ft. Wayne, IN 46866

Ph: 260-489-1685 • Fax: 260-489-0203

info@t-i-i.com

www.reelcraft.com/latinamerica

Pacific Rim

P.O. Box 53776, Clark Freeport Zone
Philippines 2023

Ph: +63 (45) 625-6624

Fax: +63 (45) 321-0643

rap@comclark.com

www.reelcraft.com/asia

Europe

Unit 17 • Cronin Courtyard
Weldon South Industrial Estate
Corby • Northamptonshire NN18 8AG
United Kingdom

Ph: +44 (0) 1536 406999

Fax: +44 (0) 1536 406777

europa@reelcraft.com

www.reelcraft.com/europe

China

Reelcraft Changzhou Co., Ltd.

Building C, No. 229 HeHai West Road

Changzhou, Jiangsu, China 213022

Ph: +86 (519) 8512 2391 ext. 8002

Fax: +86 (519) 8512 9309

rco@reelcraftchina.com

www.reelcraftchina.com

Australia

PO Box 6463 BC, Blacktown

NSW 2148, Australia

Ph: +61 (2) 9621 8988

Fax: +61 (2) 9621 7688

sales@recoila.com

www.reelcraft.com