


New Product Announcement

LED Cord Reels Series L 4000

Reelcraft has incorporated the latest in high intensity LED technology, the extreme durability of The Stubby II Lite® and the reliability of our quality constructed cord reels. There are no batteries to recharge, no portable handhelds to misplace, just light and power where you need it, when you want it.

Benefits


- **Efficient Illumination** LEDs provide excellent illumination in a more compact hand-held device. LEDs consume less power and have a much greater lifespan than either fluorescent or incandescent lighting options.
- **Durability** Hand lamp feature a shatter resistant light tube and heavy-duty inline molded tool tap.
- **Convenience** Tool tap provides portable power to electric tools and plug cap keeps debris out of plug when not in use.
- **Long Service Life** Steel reel parts are painted at the component level prior to assembly with a durable, baked-on powder coat paint. The end result is a protective finish that will look great through years of service.

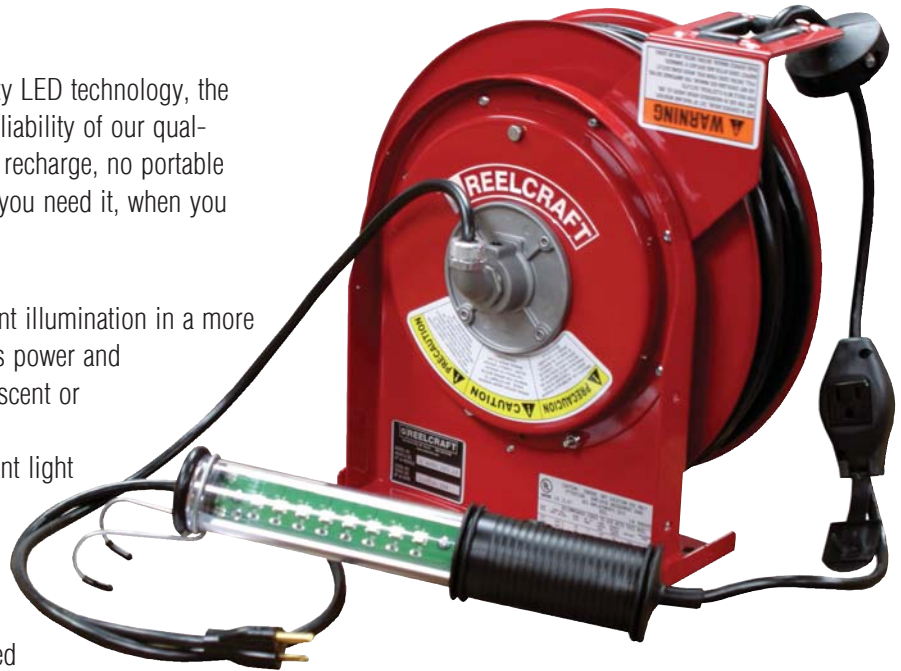

Model Shown: L 4050 163 10

Related Products

Reelcraft offers a complete line of over 2,500 standard hose, cord and cable reels. Visit us online at www.reelcraft.com for a comprehensive listing and our special manufacturing capabilities.

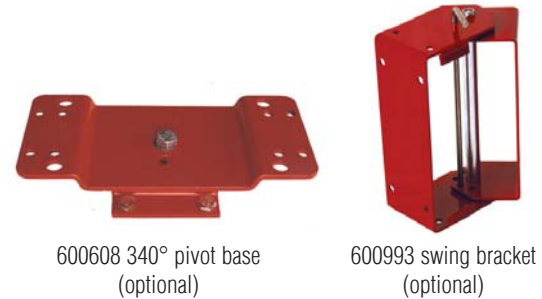

600608 340° pivot base (optional)

600993 swing bracket (optional)



Series L 4000	
DIM.	in / mm
A	13 1/4 337
B	12 5/8 321
C	8 203
D	2 1/2 64
E	9 3/8 239
F	1 3/4 44
5/16" mounting holes.	

SPECIFICATIONS

- Eight ultra high intensity 1/2 watt LEDs
- Models supplied with cord include 4-5' pigtail and three prong plug
- Adjustable cord stop
- Guide arm easily adjusts to facilitate ceiling, wall or bench mount with only standard tools.
- Polycarbonate shatter-resistant light tube

- Quiet speed latching mechanism maintains desired working length of cord.
- Finish is a baked-on, corrosion and chip resistant powder coat paint
- In-line molded tool tap capable of drawing 12 Amps max
- Protected two-way on/off switch located on handle of light.

Model with Cord	Cord Ending	Cord Specifications				Volts	Amps	Shipping Weight	
		AWG / mm	# Cond.	ft / m	Type			lbs	kg
Series L 4000 Maximum Temperature 210° F (99° C)									
L 4035 163 10	Stubby II LED w/ in line outlet	16	1.33	3	35 11	SJTOW	125	13	26 12
L 4050 163 10	Stubby II LED w/ in line outlet	16	1.33	3	50 15	SJTOW	125	13	28 13



Reelcraft Industries is
ISO 9001:2008
Certified Since 1996

Reelcraft Industries, Inc.
2842 E. Business Hwy. 30
Columbia City, IN 46725
Fax: **260-248-2605**

Toll Free Ph: **800-444-3134**
Ph: **260-248-8188**
www.reelcraft.com
reelcraft@reelcraft.com

