

Series DP5000

Compact Dual Pedestal Hose Reel


New Product Announcement

DESCRIPTION

The latest offering in Dual Pedestal design from Reelcraft, the DP5000 Series is smaller and more compact than its DP7000 Series counterpart for air/water, oil and grease up to 1/2" I.D. hose. These reels feature an unique interlocking base that provides excellent rigidity in truck mount service applications. Its diminutive profile makes it perfect in tight spaces or mounted in cabinetry.

BENEFITS

- **Serviceability** Simple, open design provides easy access to serviceable parts.
- **Strength** Heavy gauge steel with interlocking base and dual guide arms have built in forms and gussets to yield the maximum amount of strength while reducing overall weight.
- **Ease of Use** Guide arm adjusts to multiple locations and latch position prevents possibility of "latch out" at full extension of hose.
- **Corrosion Resistance** Latch pawl, ratchet and hubs are die cast aluminum, steel parts are individually powder coated and spring case is sealed with a double sided adhesive gasket.

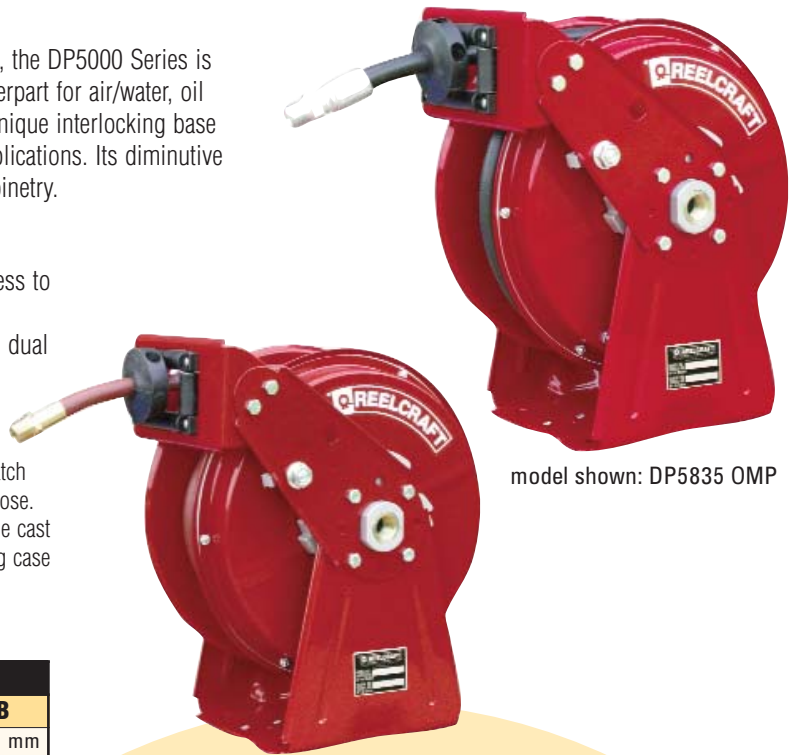

model shown: DP5835 OMP

model shown: DP5650 OLP

DIMENSIONS	MODEL	A	B
		in / mm	in / mm
	LOW PRESSURE REELS		
	DP5435 OLP	4 102	8 204
	DP5450 OLP	4 102	8 204
	DP5635 OLP	4 102	8 204
	DP5650 OLP	5 127	9 229
	DP5835 OLP	5 127	9 229
	MEDIUM PRESSURE REELS		
	DP5835 OMP	5 127	9 229
	HIGH PRESSURE REELS		
	DP5635 OHP	4 102	8 204

SPECIFICATIONS

- ✓ Double sided adhesive gasket seals spring case
- ✓ Dual base and guide arm design reduces road vibration
- ✓ Guide arm adjusts to seven different positions
- ✓ Stainless steel torsion latch spring
- ✓ Latch pawl mounted on guide arm to eliminate "latch-out"
- ✓ Parts are individually powder coated prior to assembly

MODELS WITH HOSE			HOSE CAPACITY					MODELS WITHOUT HOSE		
MODEL	WEIGHT	PRESSURE	I.D.	O.D.	(M)NPTF OUTLET	LENGTH	MODEL	WEIGHT	PRESSURE	
	lbs / kg	psi / bar						in / mm	in / mm	in
LOW PRESSURE AIR/WATER REELS Maximum Temperature 150°F (65°C)										
DP5435 OLP	32 15	300 21	1/4 6	.500 13	1/4	35 11	DP5400 OLP	31 14	500 35	
DP5450 OLP	35 16	300 21	1/4 6	.500 13	1/4	50 15	DP5400 OLP	31 14	500 35	
DP5635 OLP	34 15	300 21	3/8 10	.688 18	1/4	35 11	DP5600 OLP	32 15	500 35	
DP5650 OLP	36 16	300 21	3/8 10	.688 18	1/4	50 15	DP5600 OLP	32 15	500 35	
DP5835 OLP	40 19	300 21	1/2 13	.844 22	3/8	35 11	DP5800 OLP	36 16	500 35	
MEDIUM PRESSURE OIL REELS Maximum Temperature 210°F (99°C)										
DP5835 OMP	43 20	2000 141	1/2 13	.815 21	1/2	35 11	DP5800 OMP	34 15	3000 207	
HIGH PRESSURE GREASE REELS Maximum Temperature 210°F (99°C)										
DP5635 OHP	43 20	4000 276	3/8 10	.750 19	1/4	35 11	DP5600 OHP	35 16	5000 345	

NOTE: Reel inlet on all models is 1/2" NPT(F).



SERIES DP5000 / COMPACT DUAL PEDESTAL HOSE REEL

North America: 800-444-3134
 Europe: +44 (0) 1536 406999
 Pacific Rim: +63 (45) 625-6624
 China: (519) 8512 2391
 Latin America: 002-60-489-1685

Reelcraft Industries, Inc.
 2842 E. Business Highway 30
 Columbia City, IN 46725
 FAX: 260-248-2605
www.reelcraft.com

Reelcraft Industries is
ISO 9001:2000
 Certified Since 1996

