

## Side Mount Cart Handle

Our new side mount carts offer another means of portable reeling. A simplistic design makes them lighter and more easily maneuverable. The square tubular steel frame resists deformation even through heavy use and the baked-on powder coat guards against the elements. The cart, designed to be used with Reelcraft's 6 and 12 inch Series 30000 reels, features a Zinc-plated 1/2" steel axle and 8" semi-pneumatic tires.

### Benefits

- **Lightweight** - Square tubular steel is lighter and still provides excellent strength and rigidity under normal use.
- **Superior Corrosion-Resistance** - Painted components are powder coated prior to assembly to ensure universal coverage and maximum resistance to corrosion.
- **Easily Operated** - Oversized 8" wheels enhance maneuverability and open design allows easy access to serviceable parts on the reel itself.

### Related Products

Reelcraft offers a complete line of over 2,500 hose, cord and cable reels. For a complete product listing visit us online at [www.reelcraft.com](http://www.reelcraft.com) or call toll free 800-444-3134.



Made in USA 

**NOTE:** Cart comes with all fasteners needed to assemble. Also included are bumpers (front and rear) for front mounting slots on Series 30000 reel (reel sold separately).



#602328 shown partially assembled.  
**NOT SHOWN:** Scuff bumpers and fasteners.

Model (handle only)	Shipping Weight		Height		Width		Length	
	lbs	kg	in	mm	in	mm	in	mm
<b>602328</b>	14	7	42	1067	8	203	19 <sup>1</sup> / <sub>4</sub>	489

Dimensions are for assembled cart.

### SPECIFICATIONS

- Zinc - plated 1/2" diameter axle
- Corrosion-resistant powder coating
- 8" semi-pneumatic tires
- Made from 1" square tubing
- Hose clip
- Fasteners and scuff bumpers included
- Fits most hand crank Series 30000 reels (6" and 12" models)
- Lightweight

# New Product Announcement | Cart Reels

## Series 30000 Cart Reels

The Series 30000 is designed for rugged, heavy duty applications and features a large storage capacity. The 602328 side mount cart was specifically designed to be compatible with Series 30000 6" and 12" models. The cart and reel, as a package, offer a convenient and easily maneuverable option to store and transport long lengths of hose. Other reels not listed may be compatible. Consult manufacturer for more details.



CA32112 L

### Hose Reels


Model without hose	Shipping Weight		Pressure		Hose I.D.		(F)NPTF Reel Outlet	(F)NPTF Reel Inlet	Hose Length		Notes
	lbs	kg	psi	bar	in	mm	in	in	ft	m	
CA32106 L	40	18	1000	69	1/2	13	1/2	1/2	100	31	Air/Water
CA32112 L	46	21	1000	69	1/2	13	1/2	1/2	200	61	Air/Water
CA33106 L	41	19	1000	69	3/4	19	3/4	3/4	50	16	Air/Water
CA33112 L	46	21	1000	69	3/4	19	3/4	3/4	100	31	Air/Water
CA38106 M*	41	19	5000	345	3/8	10	1/2	1/2	140	43	Pressure Wash
CA38112 M*	46	21	5000	345	3/8	10	1/2	1/2	300	91	Pressure Wash

\*Features a Super Swivel® for pressure wash; maximum operating temperature 250 °F (121 °C).

### Cable Storage Reels

Model without cable	Cable Description				Shipping Weight		Drive Type	
	AWG	mm <sup>2</sup>	# Cond.	ft	m	lbs		kg
CA30106-CS	10	5.21	3	140	43	37	17	Hand Crank
	12	3.13	3	175	53	37	17	
	16	1.05	3	425	130	37	17	
CA30112-CS	10	5.21	3	280	86	46	21	Hand Crank
	12	3.13	3	350	106	46	21	
	16	1.05	3	850	260	46	21	

Power source must be disconnected while reeling/dereeling; for cable sizes up to 0.969" O.D.

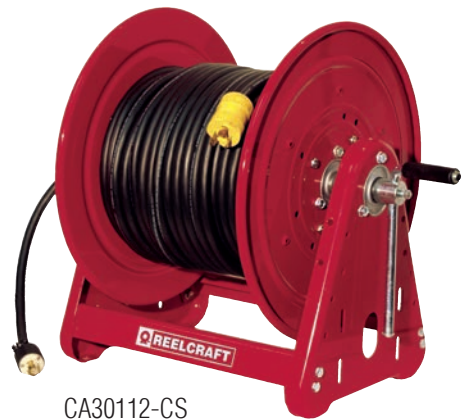

CA30112-CS  
Cable not included



BA36106 L

### Twin Welding Hose Reels

Model without hose	Shipping Weight		Pressure		Hose I.D.		(F)NPTF Reel Inlet	Hose Length		Notes
	lbs	kg	psi	bar	in	mm	in	ft	m	
BA36106 L	50	22	200	14	1/4	6	1/4	125	38	Bevel Crank
BA36112 L	57	25	200	14	1/4	6	1/4	250	76	Bevel Crank
BA36106 LT	50	22	200	14	1/4	6	1/4	125	38	Bevel Crank, T-Grade
BA36112 LT	57	25	200	14	1/4	6	1/4	250	76	Bevel Crank, T-Grade



### SPECIFICATIONS

- Adjustable spool rotation drag
- Permanently lubricated dual main bearings
- All bolted construction
- Vibration-proof self-locking fasteners