

Third Party Listings

UL 355 - UL Standard for Safety Cord Reels

UL Listing means that **UL** has tested representative samples of a product and determined that the product meets specific, defined requirements. These requirements are often based on **UL's** published and nationally recognized Standards for Safety.

- UL tests the product and the manufacturing facility to certify that the product is safe if used as intended
- Recognized as the standard worldwide
- Mitigates insurance liability



CSA - C22.2 NO. 21-95 - Cord Sets & Power Supply Cords

CSA International certification marks indicate that a product, process or service has been tested to a Canadian or U.S. standard and it meets the requirements of an applicable **CSA** standard or another recognized document used as a basis for certification.

- Similar to UL, but preferred in some instances



Series L 3000 Cord Reels

- Ultra-compact for a wide range of bench mount or mobile applications with critical space requirements
- Easily fit within a 1 ft. x 1 ft. space
- Multiple slotted mounting holes to accommodate many configurations



NEW!
L 3030 123 7Q



S602805 - Optional guide arm accessory; refer to online tech bulletin for installation instructions

| Model w/ cord & bumper | Cord Ending | Cord Specifications | | | | | Volts | Amps | Weight | | |
|------------------------|--|---------------------|-----------------|--------|----|---|-------|------|--------|-----|-----|
| | | AWG | mm ² | # Cond | ft | m | | | Type* | lbs | kg |
| L 3030 123 3 | Single receptacle NEMA 5-15R, Inlet straight blade plug NEMA 5-15P | 12 | 3.32 | 3 | 30 | 9 | SJTO | 125 | 15 | 23 | 10 |
| L 3030 123 7Q | Quad box outlet NEMA 5-20R, Inlet straight blade plug NEMA 5-20P | 12 | 3.32 | 3 | 30 | 9 | SJTO | 125 | 20 | 25 | 11 |
| L 3030 123 X | Flying Lead both ends | 12 | 3.32 | 3 | 30 | 9 | SJTO | 125 | 20 | 24 | 11 |
| S602805 | Optional guide arm accessory for multiple adjustment positions | | | | | | | | | 1.1 | 0.5 |

For indoor non-weathertight applications only. All models UL listed at 125 Volt 60 HZ single phase. Models supplied with 4 ft. inlet cord. *Cord type designation shows all combinations of cord types that may be used, only UL approved cord types will be used.

| Under Bench Mount | Dimensions | |
|-------------------|---------------------------------|-----|
| | in | mm |
| A | 11 ³ / ₁₆ | 284 |
| B | 11 ¹ / ₁₆ | 281 |
| C | 9 ¹ / ₄ | 235 |
| D | 8 | 203 |
| E | 4 ³ / ₁₆ | 106 |
| F | 6 | 152 |
| G | 2 ¹ / ₂ | 64 |

Triple Tap Power Cord Reels

Models with a ★ icon are our most popular models.




| Model w/ cord & bumper | Cord Ending | Cord Specifications | | | | | Volts | Amps | Shipping Weight | | Size Index # | |
|------------------------|---|---------------------|-----------------|--------|-----|----|--------|------|-----------------|-----|--------------|----|
| | | AWG | mm ² | # Cond | ft | m | | | Type** | lbs | | kg |
| L 4050 163 9 | Triple tap outlet NEMA 5-15R, Inlet straight blade plug NEMA 5-15P | 16 | 1.33 | 3 | 50 | 15 | SJEOOW | 125 | 13 | 26 | 12 | 1 |
| L 4545 123 9 ★ | | 12 | 3.32 | 3 | 45 | 14 | SJEOOW | 125 | 15 | 28 | 13 | 1 |
| L 70075 123 9 | | 12 | 3.32 | 3 | 75 | 23 | SEOOOW | 125 | 15 | 71 | 32 | 5 |
| L 70100 123 9 | | 12 | 3.32 | 3 | 100 | 30 | SEOOOW | 125 | 15 | 75 | 34 | 5 |
| L 4545 123 9G ★ | Triple tap outlet w/ GFCI* NEMA 5-15R, Inlet straight blade plug NEMA 5-15P | 12 | 3.32 | 3 | 45 | 14 | SJEOOW | 125 | 15 | 29 | 13 | 1 |
| L 70100 123 9G | | 12 | 3.32 | 3 | 100 | 30 | SEOOOW | 125 | 15 | 76 | 34 | 5 |
| L 4545 123 9GC | Triple tap outlet w/ GFCI* NEMA 5-15R, Inlet twist lock plug NEMA L5-15P | 12 | 3.32 | 3 | 45 | 14 | SJEOOW | 125 | 15 | 29 | 13 | 1 |

For indoor non-weathertight applications only. All models UL listed at 125 Volt 60 HZ single phase. Swing brackets or pivot bases should be used if cords are pulled at more than 45°, see page 39. *The GFCI Receptacle is designed to protect from line-to-ground shock hazards. It does not protect against short circuits or overloads; this is the function of the fuse or circuit breaker. **Cord type designation shows all combinations of cord types that may be used, only UL approved cord types will be used.



Cord End Specifications

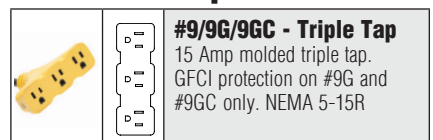

#9/9G/9GC - Triple Tap
15 Amp molded triple tap. GFCI protection on #9G and #9GC only. NEMA 5-15R

Refer to page 30 for dimensional drawings.