


Premium Duty Spring Retractable Hose Reels

Series 3000 - Air/Water - 1/4", 3/8" I.D.

- Ultra-compact for a wide range of bench mount or mobile applications with critical space requirements
- Compact size - reel easily fits within a 1 ft. x 1 ft. space
- Multiple slotted mounting holes to accommodate many configurations
- All steel components are individually powder coated to virtually eliminate corrosion

NEW!

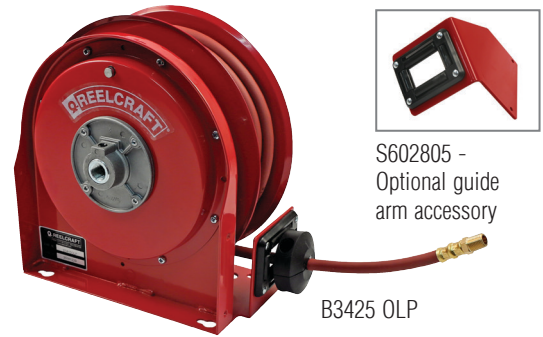

S602805 -
Optional guide
arm accessory

B3425 OLP

Additional Series 3000 Models

Cord Reels - Page 27

Model with hose & bumper	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		Max Pressure		NPT(M) Hose Outlet	NPT(F) Reel Inlet	NPT(F) Reel Outlet
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in	in
Low Pressure Air / Water Hose Reels Maximum temperature 150 °F (65 °C)													
B3425 OLP	18	8.2	1/4	6	.475	12	25	7.6	300	21	1/4	3/8	3/8
B3620 OLP	18	8.2	3/8	10	.600	15	20	6.1	300	21	1/4	3/8	3/8
S602805	1.1	0.5	Optional guide arm accessory for multiple adjustment positions										

Low pressure reels supplied with PVC hose.

Under Bench Mount		Dimensions	
		in	mm
A	11 ³ / ₁₆	284	
B	11 ¹ / ₁₆	281	
C	6	152	
D	8	203	
E	4 ³ / ₁₆	106	
F	6	152	
G	2 ¹ / ₂	64	

Premium Duty Spring Retractable Reels

Series 4000 - Air/Water - 1/4", 3/8" I.D.



- Compact for a wide range of applications with critical space requirements
- Guide arm adjusts to two positions
- Inlet hose is plumbed into the base to eliminate the risk of stress on the swivel
- The reliable speed latch allows for positive locking of the spool in two positions per rotation

Additional Series 4000 Models

Cord Reels - Page 27-30

Series 4000 reels include a speed latch mechanism that uses a cam and disc for quiet operation.

Models with a ★ icon are our most popular models.

Model with hose & bumper	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		*Max Pressure		NPT(M) Hose Outlet	NPT(F) Reel Inlet	NPT(F) Reel Outlet
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in	in
Low Pressure Air/Water Reels Maximum Temperature 150 °F (65 °C)													
4420 OLP	18	8	1/4	6	.475	12	20	6	300	21	1/4	3/8	1/4
4425 OLP	19	9	1/4	6	.475	12	25	8	300	21	1/4	3/8	1/4
4435 OLP	19	9	1/4	6	.475	12	35	11	300	21	1/4	3/8	1/4
4625 OLP ★	20	9	3/8	10	.600	15	25	8	300	21	1/4	3/8	1/4

Low pressure reels supplied with PVC hose. *Maximum working pressure at 70 °F (20 °C)



4625 OLP

Dimensions		in	mm
A	12 ⁷ / ₈	327	
B	12 ⁵ / ₈	321	
C	8	203	
D	2 ¹ / ₂	64	
E	5 ⁵ / ₈	143	



Interactive Reel Catalog

Visit reelcraft.com/catalog for complete product specifications, available parts, and accessories.



Pivot Bases & Swing Brackets

See page 39

Model without hose & bumper	Shipping Weight		Hose Capacity			Max Pressure		NPT(F) Reel Inlet		NPT(F) Reel Outlet	
			I.D.	O.D.	Length						
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in
Low Pressure Air/Water Reels Maximum Temperature 210 °F (99 °C)											
4400 OLP	17	8	1/4	6	.475	12	35	11	500	35	3/8
4600 OLP	17	8	3/8	10	.600	15	25	8	500	35	3/8