

New Product Announcement | Compact Series 3000

Premium Duty Hose and Cord Reels Series 3000

Series 3000 reels are all-steel construction and ultra-compact for a wide range of bench mount or mobile applications with critical space requirements.

- **Compact size** - Reel easily fits within a 1 ft. x 1 ft. space.
- **Easy to mount** - Multiple slotted mounting holes to accommodate many configurations.
- **Inlet located on base** - Eliminates the possibility of cord/hose interfering with spool operation.
- **Optional guide arm accessory** - Guide arm integral to reel base on standard reel, optional accessory available for multiple adjustment positions.
- **Guide rollers** - Premium acetal rollers extend hose and cord life.
- **Enclosed drive spring** - Mechanism enclosed for protection against the environment.
- **Adjustable bumper stop** - Allows any desired length of hose or cord to be maintained outside the reel.
- **Corrosion resistant** - Steel components are individually powder coated to virtually eliminate corrosion.

NEW!

Power cord reel
L 3030 123 3





NEW!

Air/water hose reel
B3425 OLP



Optional guide arm accessory for multiple adjustment positions

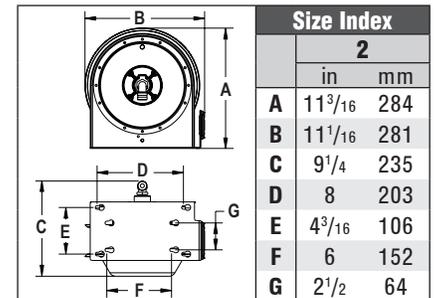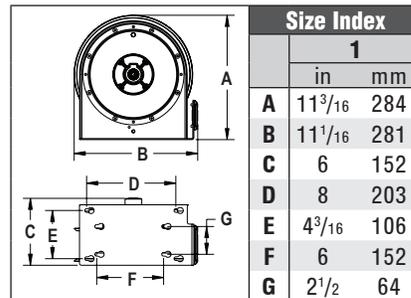

Hose Reels

Model with hose	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		Max Pressure		NPT(M) Hose Outlet	NPT(F) Reel Inlet	Size Index #
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in	
Low Pressure Air / Water Hose Reels Maximum temperature 150 °F (65 °C)													
B3425 OLP	18	8.2	1/4	6	.475	12	25	7.6	300	21	1/4	3/8	1
B3610 OLP	17	7.7	3/8	10	.600	15	10	3.0	300	21	1/4	3/8	1
B3620 OLP	18	8.2	3/8	10	.600	15	20	6.1	300	21	1/4	3/8	1

Low pressure reels furnished standard with PVC hose.

Cord Reels

Model with Cord	Cord Ending	Cord Specifications						Volts	Amps	Weight		Size Index #
		AWG	mm ²	# Cond	ft	m	Type			lbs	kg	
L 3030 123 3	Single Receptacle	12	3.32	3	30	9	SJTO	125	15	23	10.4	2
L 3030 123 7Q	Quad Box	12	3.32	3	30	9	SJTO	125	20	24.5	11.1	2
L 3030 123 X	Flying Lead	12	3.32	3	30	9	SJTO	125	20	23.5	10.7	2

For indoor, non-weather tight applications only. All models UL listed at 125 Volt 60 HZ single phase. Models supplied with 4 ft. inlet cord.

Customer Service: 1.855.634.9109
All Other Calls: 1.800.444.3134

www.reelcraft.com
reelcraft@reelcraft.com

