



SERIES 30000

Motor Driven and Hand Crank

Premium Duty Hose Reels

Designed for rugged applications requiring long lengths of hose and large storage capacity

All-bolted unitized construction with no welds to fatigue, full flow swivel, heavy duty gauge steel frame and spool, and aluminum drum ensure the longest service life

T-handle tensioning device allows proper tension to be applied to the spool to eliminate the free spooling of the reel

Vibration-proof, self-locking fasteners are ideal for industrial use or field use such as turf care or pest control

Optional spring driven lock pin to prevent spool rotation when the reel is not in use, S600874



CA32112 L



AIR



WATER



OIL

I.D. Hose Sizes

1/2", 3/4", 1"



Change the tension on your reel using the T-handle.



Removable gooseneck makes hose installation easy.



Interactive
Reel Catalog




1.800.444.3134 | reelcraft.com

Model without Hose and Bumper	Shipping Weight		Hose Capacity			Max Pressure	NPT(F) Reel Inlet	NPT(F) Reel Outlet	D	E	F	G
			I.D.	O.D.	Length							
	lbs	kg	in mm	in mm	ft m	psi bar	in	in	in mm	in mm	in mm	in mm
Manual Hand Crank Hose Reels Maximum Temperature 210°F (99°C)												
CA32106 L	40	18	1/2 13	.750 19	100 30	100 69	1/2	1/2	9 ³ / ₄ 248	19 ³ / ₄ 502	6 152	6 ³ / ₈ 162
CA32112 L	46	21	1/2 13	.750 19	200 61	1000 69	1/2	1/2	15 ³ / ₄ 400	25 ³ / ₄ 654	12 305	6 ³ / ₈ 162
CA32118 L	51	23	1/2 13	.750 19	325 99	1000 69	1/2	1/2	21 ³ / ₄ 552	31 ³ / ₄ 806	18 457	6 ³ / ₈ 162
CA32106 M	42	19	1/2 13	.850 22	100 30	3000 207	1/2	1/2	9 ³ / ₄ 248	19 ³ / ₄ 502	6 152	6 ³ / ₈ 162
CA32112 M	46	21	1/2 13	.850 22	200 61	3000 207	1/2	1/2	15 ³ / ₄ 400	25 ³ / ₄ 654	12 305	6 ³ / ₈ 162
CA32118 M	52	24	1/2 13	.850 22	325 99	3000 207	1/2	1/2	21 ³ / ₄ 552	31 ³ / ₄ 806	18 457	6 ³ / ₈ 162
CA33106 L	41	19	3/4 19	1.075 27	50 15	1000 69	3/4	3/4	9 ³ / ₄ 248	19 ³ / ₄ 502	6 152	6 ³ / ₈ 162
CA33112 L	46	21	3/4 19	1.075 27	100 30	1000 69	3/4	3/4	15 ³ / ₄ 400	25 ³ / ₄ 654	12 305	6 ³ / ₈ 162
CA33118 L	51	23	3/4 19	1.075 27	175 53	1000 69	3/4	3/4	21 ³ / ₄ 552	31 ³ / ₄ 806	18 457	6 ³ / ₈ 162
CA33112 M	47	21	3/4 19	1.188 30	100 30	3000 207	3/4	3/4	15 ³ / ₄ 400	25 ³ / ₄ 654	12 305	6 ³ / ₈ 162
CA33118 M	51	23	3/4 19	1.188 30	175 53	3000 207	3/4	3/4	21 ³ / ₄ 552	31 ³ / ₄ 806	18 457	6 ³ / ₈ 162
CH37112 L*	60	27	1 25	1.375 35	50 15	1000 69	1	1	15 ³ / ₄ 400	25 ³ / ₄ 654	12 305	8 203
CH37118 L*	64	29	1 25	1.375 35	100 30	1000 69	1	1	21 ³ / ₄ 552	31 ³ / ₄ 806	18 457	8 203
Electric Motor Driven Hose Reels Maximum Temperature 210°F (99°C). Motor control accessories not included.												
EA32106 L12D	60	27	1/2 13	.750 19	100 30	1000 69	1/2	1/2	9 ³ / ₄ 248	19 ⁵ / ₈ 498	6 152	6 ³ / ₈ 162
EA32112 L12D	64	29	1/2 13	.750 19	200 61	1000 69	1/2	1/2	15 ³ / ₄ 400	23 ⁷ / ₈ 606	12 305	6 ³ / ₈ 162
EA32118 L12D	68	31	1/2 13	.750 19	325 99	1000 69	1/2	1/2	21 ³ / ₄ 552	29 ⁵ / ₈ 752	18 457	6 ³ / ₈ 162
EA33106 L12D	63	29	3/4 19	1.075 27	50 15	1000 69	3/4	3/4	9 ³ / ₄ 248	19 ⁵ / ₈ 498	6 152	6 ³ / ₈ 162
EA33112 L12D	68	31	3/4 19	1.075 27	100 30	1000 69	3/4	3/4	15 ³ / ₄ 400	23 ⁷ / ₈ 606	12 305	6 ³ / ₈ 162
EA33118 L12D	68	31	3/4 19	1.075 27	175 53	1000 69	3/4	3/4	21 ³ / ₄ 552	29 ⁵ / ₈ 752	18 457	6 ³ / ₈ 162
EH37118 L12D*	82	37	1 25	1.375 35	100 30	1000 69	1	1	21 ³ / ₄ 552	31 787	18 457	8 203
Air Motor Driven Hose Reels Filter, regulator, lubricator required. Maximum Temperature 210°F (99°C). Motor control accessories not included.												
AA32106 L4A	54	24	1/2 13	.750 19	100 30	1000 69	1/2	1/2	9 ³ / ₄ 248	17 ¹ / ₄ 438	6 152	6 ³ / ₈ 162

CAUTION: To prevent drum damage fully extend and pressurize hose and rewind on the reel. *All 1 in. reel models have an 8 in. (203 mm) diameter aluminum drum.

Hose I.D.	1/4"	3/8"	1/2"	3/4"	1"
	6 mm	10 mm	13 mm	19 mm	25 mm
Hose O.D.	.530"	.710"	.850"	1.188"	1.375"
	13 mm	18 mm	22 mm	30 mm	35 mm
"F" Width	Hose Capacity				
6"	200'	140'	100'	50'	N/A
152 mm	61 m	43 m	30 m	15 m	
12"	425'	300'	200'	100'	50'
305 mm	130 m	91 m	61 m	30 m	15 m
18"	625'	450'	325'	175'	100'
457 mm	191 m	137 m	99 m	54 m	31 m
22"	780'	550'	400'	225'	125'
559 mm	238 m	168 m	122 m	69 m	38 m
27"	1000'	700'	500'	275'	150'
686 mm	305 m	213 m	152 m	84 m	46 m

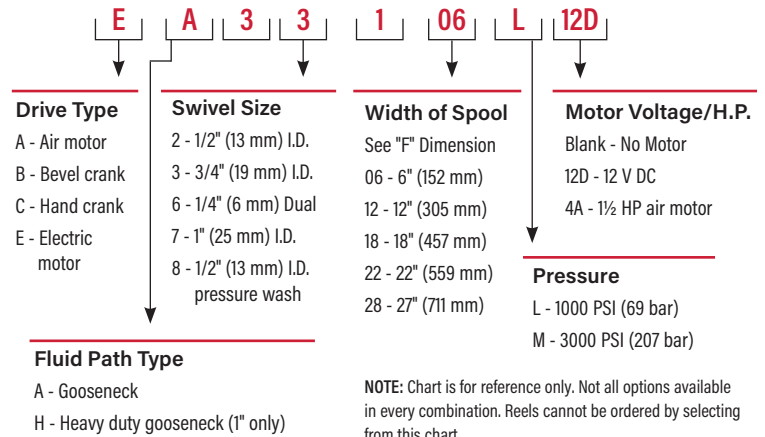

Additional Models Available for:

